

# Experimental base study for finding Maximum Energy, Produce by solar parabolic dish for consumption of Electric energy

Kardile S.K., Dr. Uttarwar S.S., Prof. Kathwate S.D.

**Abstract-** This experimental analysis based on output of solar energy under studied in ahmednagar city. In every minute solar energy changes with time because of earth rotation in this experiment we will find angle of solar parabolic dish in which maximum energy will get. Nowadays energy is important factor in our life so concentrate on saving energy. With maximum use of renewable energy sources save fuel and life period of fuel increases. This statistical data in which we taken reading in every hours basis and evaluate maximum output energy at some angle. In this Experiment we studies in ahmednagar city which latitude 19.09 degree N , the optimum tilt angle for solar panels during winter will be  $19.09 + 15 = 34.09$  degree. Solar energy produced when hydrogen convert in to helium form that time energy is produced which transfer i all direction. Up to this year more than one lack villages not having electricity so use of solar is essential for devolved nation. When solar energy use there no any harmful material produced during production of electric energy. This experiment done in industry where steam generation available. For maximum output energy we changes angle with respect to time and observe that steam producing system so it will beneficial cost consumption as well as time consumption but during manufacturing time is very important factor so minimum time we will find out so during that maximum steam generated and evaluate that angle. Solar depended on geography because of are closer to equator have greater solar energy. Doe to that position will be changes with respect to solar position.

**Index Terms**—Solar Parabolic Dish, Tilt Angle, Latitude, Solar Tower.

## I. INTRODUCTION

Experiment we use parabolic type dish collector. Basically there are four type of parabolic dish collector. They are Linear Fresnel , Parabolic Trough, Parabolic Dish , Solar Tower respectively. In linear Fresnel which focusing type is line which having 1 tracking axis concentration ratio is 10 to 40. Which give temperature between 60 to 250 degree Celsius. Second type is parabolic trough which is one tracking axis , focusing type is line which concentration ration is 10 to 85 and maximum temperature range is 60 to 400 degree Celsius. A parabolic trough is of solar thermal collector that is straight which is one dimension and curved as a parabola in the other two, lined with a polished with metal mirror.

**Kardile S.K.**,P.G. Student , Heat Power Engineering, SPPU, GHRCOEM, Ahmednagar, India, Mobile No :- 8149994098.

**Dr. Uttarwar S.S.**, Profesoor, Mechanical Engineering Department, SPPU, GHRCOEM, Ahmednagar, India, Mobile No:- 9822220993.

**Prof. Kathwate S. D.** Assistant Profesoor, Mechanical Engineering Department, SPPU, GHRCOEM, Ahmednagar, India, Mobile No:- 8087084953

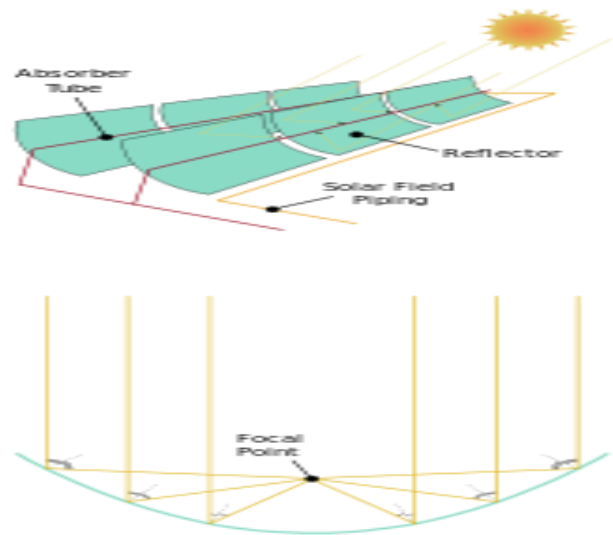


Fig. 1 Parabolic Trough

Third type is parabolic dish type in which focusing type is fixed which is point in one point we get all energy and tracking axis is two which type generally use in various application concentration ration is 600 to 2000 due to that temperature range is also high which is 100 to 1500 degree Celsius. Forth type is solar tower which is also point type focus and two tracking axis concentration ration is 300 to 1500 which gives temperature is 150 to 2000 degree Celsius temperature. The solar power tower is also called as 'central tower' power plants or 'heliostat' power plants or power towers in which is a type of solar furnace using a tower to receive the focused sunlight. It applicator for an array of flat, movable mirrors (called heliostats) to focus the sun's rays upon a collector tower (the target).



Fig. 2 Solar Power Tower

## Experimental base study for finding Maximum Energy, Produce by solar parabolic dish for consumption of Electric energy

This experiment conduct in ahmednagar city where we will find tilt angle for that we obtain maximum solar energy in may and minimum in December because of winter season.

### II. PROCEDURE

#### A. Review Stage

We will find maximum output tilt angle where maximum solar energy get for that in every day we observe temperature of given. Solar radiation strikes on parabolic dish then after by concentration this energy transfer to receiver and then by conduction, convection heat transfer to water. This experiment actually work in European countries but in India there is no any research on tilting angle and output of temperature.

By Tougochi Method we evaluate best utilized method to find angle which give maximum output.

#### B. Methodology

In this Experiment Tilt angle means deflection of tower and observe temperature.

Instrument use in experiment:-

We work on parabolic dish type for observation of temperature. Generally mostly use of solar type this parabolic type dish are use where angle will be changes by manually.



Fig.3 Parabolic Type Dish.



Fig.4 Angle changing handle

This Instrument are use foe changing Angle of parabolic dish which is change type. Where handle arrangement is there by suing that dish angle will changes. Rotation of devise is measure and respect to changes rotation angle of dish type parabolic observe.



Fig.5 Water Storage device

This is water storage device in which hot water stored under the process. Insulation are covered to tank so reduce losses and maximum output given.



Fig. Electric Panel

In this Experiment we compare our result with diesel engine which already use for application. We compare our experiment for that so energy will be save.

#### C. Final Stage

By hanging angle of parabolic dish observe temperature of output and evaluate best angle for in any season so that angle will be for throughout year. Purpose of project is to save electric a energy and diesel energy so here we compare diesel engine result also..

### III. CONCLUSION

Changing angle of parabolic dish is very hectic so reduce human effort as well as to evaluate angle which is beneficial for industry so that energy will save.

ACKNOWLEDGMENT

I am highly gratefully thanks to Hon. Prof. Dr. Uttarwar S. S. for their guidance, support and Motivation behind this work. His encouragement and useful suggestion, which helped me I would also like to mention Prof. Kathwate S. D. for their encouragement and cooperation in carrying out project work.

REFERENCES

- [1] Danny H.W.Li and Tony N.T.Lam ,Determining the Optimum Tilt Angle and Orientation for Solar Energy Collection Based on Measured Solar Radiance Data, Hindawi Publishing Corporation , International Journal of Photoenergy Volume 2007, Article ID 85402, 9 pages doi:10.1155/2007/85402.
- [2] M. Chisamera, S. Stan, I. Riposan, E. Stefan, G. Costache, Thermal analysis of Inoculated Grey Cast Irons, UGALMAT, Galati, Technologiisi Materiale Avansate, University press, Vol.1, 2007, pp.17-23.
- [3] Seidu, S.O, Influence of Inoculant's type on thermal analysis parameters of ductile irons international conference, Galati, Romania, 2008, pp. 237-241.
- [4] HaixiangZang , MianGuo, Zhinong Wei and Guoqiang Sun, Determination of the Optimal Tilt Angle of Solar Collectors for Different Climates of China , College of Energy and Electrical Engineering, Hohai University, Nanjing 211100, China, 18 May 2016; Accepted: 5 July 2016; Published: 11 July 2016
- [5] Feng-Jiao Liu and Tian-Pau Chang, Optimizing the Tilt Angle of Solar Collector under Clear Sky by Particle ,Swarm Optimization Method , Journal of Applied Science and Engineering, 2015, Vol. 18, No. 2, pp. 167172 , DOI: 10.6180/jase.2015.18.2.09 .
- [6] Navaneet Maru, Jayashri Vajpai, Modelbased Optimization of Tilt angle for Solar PV Panels in Jodhpur, International Journal of Computer Applications (0975 – 8887) National Conference on Intelligent Systems , (NCIS 2014) , 32 .
- [7] Amita Chandrakar, Yogesh Tiwari, Optimization of Solar Power by varying Tilt Angle/Slope, International Journal of Emerging Technology and Advanced Engineering, 2013, ISSN 2250-2459, ISO 9001:2008 Certified Journal, Volume 3, Issue 4.
- [8] Srinivas Athreya, Dr Y.D. Venkatesh , Application of Taguchi Method For Optimization of Process Parameters In Improving The Surface Roughness Of Lathe Facing Operation, International Refereed Journal of Engineering and Science (IRJES) ISSN (Online) 2012, 2319-183X, (Print) 2319-1821 Volume 1, Issue 3 .
- [9] Abhishek Agarwal, Vineet Kumar Vashishtha, S.N. Mishra, (2012), Solar Tilt Measurement of Array for Building Application and Error Analysis, international journal of renewable energy research, vol.2, no.4 .
- [10] Abhishek Agarwal , Vineet Kumar Vashishtha, Dr. S.N. Mishra , (July – 2012 ), Comparative approach for the optimization of tilt angle to receive maximum radiation, International Journal of Engineering Research & Technology (IJERT) , ISSN: 2278-0181 , Vol. 1 Issue 5.
- [11] Ying-Pin Chang , Der-An Wang , (2010) , Optimization of Tilt Angle for Photovoltaic Modules Based on the Neural-Genetic Algorithm , Journal of Nan Kai, Vol. 7, No. 1, pp.57-70
- [12] T. Pavlović, Z. Pavlović, L. Pantić, Lj. Kostić, (2010) determining optimum tilt angles and orientations of photovoltaic panels in niš, serbia, Contemporary Materials 1–2 , UDK 694:547.281:66.094.
- [13] M. Jamil Ahmad\* and G.N. Tiwari , (2009) , Optimization of Tilt Angle for Solar Collector to Receive Maximum Radiation, The Open Renewable Energy Journal, 2, 19-24

**Kardile S.K.**, B.E. In Mechanical Engineering Department, PGDMM, 24 Years Experience In Teaching Field, Working As Diploma Coordinator In G.H. Rasoni College Of Engineering And Management Polytechnic Ahmednagr.

**Dr. Uttarwar S.S.** B.E.(Mech) , M.Tech.(Ind Engg VRCE) , MBA(HR) , Ph.D.(Mech, VNIT Nagpur) LMISTE , MIE , ISBM,. Working as Principal in G.H.Rasoni College of Engineering & Management , Ahmednagar.

**Prof. Kathwate S.D.** BE In Mechanical Engineering Department, ME in Heat Power , Working as ME Coordinator In G.H. Rasoni College of Engineering And Management , Ahmednagr